

# FUGALITE® Cleaning Guide

Professional  
tools for perfect  
cleaning  
of grouted  
surfaces.



**KERA KOLL**  
The GreenBuilding Company

# DETERGENTS AND CLEANERS

## Fuga-Wash Eco

Eco-friendly detergent to be used as an additive in water used to clean Fugalite®.

- Facilitates cleaning of covering materials
- Keeps the sponge cleaner

STRENGTH



## Fuga-Soap Eco

Eco-friendly detergent to remove stains of Fugalite®.

- Ideal for cleaning after fixing
- Suitable for all surfaces

STRENGTH



## Fuga-Shock Eco

Eco-friendly cleaner, ready to use, for removing residues and streaks.

- Highly effective
- Floors and walls

STRENGTH



# SPONGES AND ACCESSORIES

## Trowel

Rubber spreader for Fugalite® application.

- Guarantees complete filling of the gap



APPLICATION

## Cellulose sponge

Natural cellulose sponge with support plate for handle.

- Powerful cleaning
- Stays clean for longer



CLEANING

## Abrasive felt pad

White abrasive felt pad with support plate for handle and felt pad.

- Effective mechanical action



CLEANING AND ABRASION

## Foam rubber sponge

Fine pore foam rubber sponge with support plate for handle.

- Ideal for extrafine finishing




SMOOTHING



# FUGALITE® *Cleaning Guide*

## PREPARATION

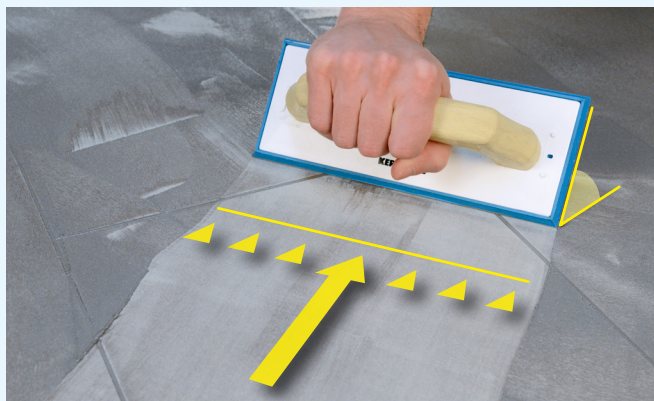

### First cleaning with rubber spreader

Once the joints have been filled, remove any excess grout that is left on the tiles immediately with the rubber spreader (working diagonally).



### Addition of Fuga-Wash Eco to the cleaning water

Recommended dosage: 1 measuring cap for every 5 litres of water.

Use the wash-boy ① to carry out the first cleaning pass with a cellulose sponge or abrasive felt pad, removing any excess grout from the flooring.

Use wash-boy ② to carry out the second and final cleaning pass, finishing and smoothing the grout in the joint. Change the washing water frequently so that it is always clean. Replace the sponge or felt pad if they become impregnated with product.

## FIRST PASS



### Cleaning with cellulose sponge

Clean when the grout is still fresh, using a cellulose sponge dampened with the water from wash-boy ①. Use circular movements to soften the film of grout on the tiles and finish the joints. Collect up the emulsion formed on the tiles using the sponge.



### Cleaning with abrasive felt pad for structured surfaces

For more structured surfaces, clean when the grout is still fresh, using a felt pad dampened with the water from wash-boy ①.

Use circular movements to soften the film of grout on the tiles and finish the joints. Collect up the emulsion formed on the tiles using the sponge.

# Professional tools for perfect cleaning of grouted surfaces with Fugalite®

## SECOND PASS



### Finishing with a cellulose sponge

Finish cleaning with a cellulose sponge dampened with water from wash-boy ②, working diagonally to the tiles so as not to dig into the joints. Do not walk on the damp floors for at least 12 - 24 hours, to avoid leaving dirt.



### Finishing with foam rubber sponge for a smoother joint

For a smooth finish, complete cleaning with a foam rubber sponge dampened with water from wash-boy ②, working diagonally to the tiles so as not to dig into the joints.

## THE FOLLOWING DAY



Once the grout has dried, any traces of dirt and streaks can be removed using **Fuga-Soap Eco**, to be diluted in accordance with the amount of grout to be removed and the curing time for Fugalite®.

**Recommended dosage:** 2 - 3 parts water to 1 part Fuga-Soap Eco on the day after; undiluted after 3 days.



Distribute the product over the surface to be treated, using the abrasive felt pad and leaving a thin, even film of liquid. **Leave Fuga-Soap Eco to work for about 10/30 minutes.**



Collect up the detergent solution with the sponge, rubber scraper or liquid vacuum system for large surfaces. Rinse thoroughly with clean water.



Dry immediately with a dry cloth or liquid vacuum system, without allowing the residual water to evaporate.

Repeat for highly stubborn dirt.

## SPECIAL CLEANING



When the grout has hardened (after at least 7 days), any residue and streaks can be removed using **Fuga-Shock Eco**.

Distribute the product undiluted over the surface to be treated, using the abrasive felt pad. Leave Fuga-Shock Eco to act for approximately 2 - 5 minutes, then carry out the same rinsing and drying operations indicated for cleaning on the day after application.

# FUGALITE®

THE RANGE OF GUARANTEED  
WATERPROOF, STAIN-PROOF GROUTS.



**FUGALITE® ECO**, liquid ceramic for the smooth, unbroken  
grouting of all ceramic and glass mosaic coverings.

**FUGALITE® ECO INVISIBLE**, liquid glass with photochromatic  
effect for laying and grouting of glass mosaic.

YOUR TRUSTED RESELLER:



**KERAKOLL UK LTD.**

Unit 4, The Croft, Buntsford Gate Business Park  
Bromsgrove, Worcestershire B60 4JE, United Kingdom  
Tel +44 01527 578000 - Fax +44 01527 578170  
info@kerakoll.co.uk - www.kerakoll.com



MKT-TEC printed on 03/2019  
Ref. GBR Data Report - 02/2019